


Průmyslové LED lampy – Série 1 120 W, 150 W a 200 W

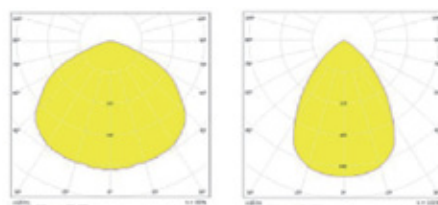

120°

60°

Model	LEDLAMP-120W	LEDLAMP-150W	LEDLAMP-200W
Příkon	120 W	150 W	200 W
Vstupní napětí:	100-260 V	100-260 V	100-260 V
Světelný tok	12 000 lm	15 000 lm	20 000 lm
Barva světla	4000/5000/6000 K	4000/5000/6000 K	4000/5000/6000 K
Úhel svitu	120°, 60°	120°, 60°	120°, 60°
Typ LED	Bridgelux 45 mil	Bridgelux 45 mil	Bridgelux 45 mil
Rozměry	740 x 420 mm	760 x 420 mm	780 x 420 mm
Zdroj	Mean Well	Mean Well	Mean Well
Hmotnost	8 kg	9 kg	10 kg
Provozní teplota	-40 až +50 °C	-40 až +50 °C	-40 až +50 °C
Třída ochrany	IP65	IP65	IP65



Barcco Systém s.r.o.

1. Čs. armádního sboru 1322, Ostrava-Poruba
Tel.: +420 596 139 115, e-mail: barlux@barlux.cz

www.barlux.cz

