


## Průmyslové LED lampy – Série 1 50 W, 80 W a 100 W

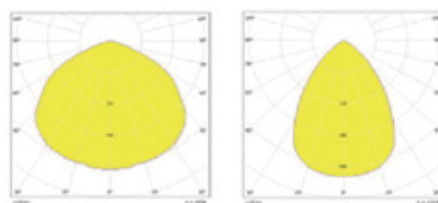

120°

60°

Model	LEDLAMP-50W	LEDLAMP-80W	LEDLAMP-100W
Příkon	50 W	80 W	100 W
Vstupní napětí:	100-260 V	100-260 V	100-260 V
Světelný tok	5 000 lm	8 000 lm	10 000 lm
Barva světla	4000/5000/6000 K	4000/5000/6000 K	4000/5000/6000 K
Úhel svítu	120°, 60°	120°, 60°	120°, 60°
Typ LED	Bridgelux 45 mil	Bridgelux 45 mil	Bridgelux 45 mil
Rozměry	540 x 420 mm	580 x 420 mm	620 x 420 mm
Zdroj	Mean Well	Mean Well	Mean Well
Hmotnost	4,7 kg	5 kg	5,5 kg
Provozní teplota	-40 až +50 °C	-40 až +50 °C	-40 až +50 °C
Třída ochrany	IP65	IP65	IP65


**Barcco Systém s.r.o.**

 1. Čs. armádního sboru 1322, Ostrava-Poruba  
 Tel.: +420 596 139 115, e-mail: barlux@barlux.cz

[www.barlux.cz](http://www.barlux.cz)
